




Timken BEARINGS INDUSTRY

40 mm x 78 mm x 12 mm NSK 54308 thrust ball bearings

Bearing No. 54308

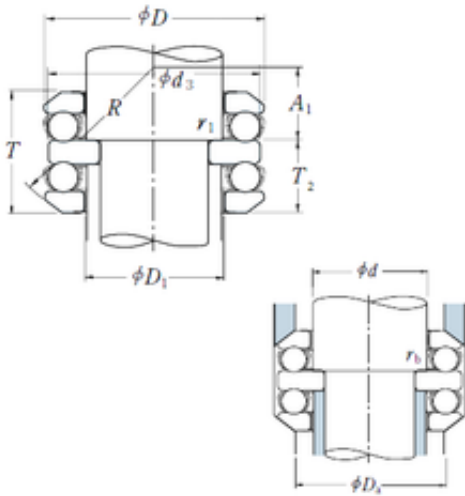

54308 Bearing 2D drawings and 3D CAD models

Size	40x78x54 mm
Bore Diameter	40 mm
Outer Diameter	78 mm
Width	54 mm
d	40 mm
d2	30 mm
D	78 mm
T	54 mm
T2	33 mm
d3	78 mm
r min.	1 mm
r1 min.	0,6 mm
A1	23,5 mm
B	12 mm
D1	42 mm
R	64 mm
Da max.	60 mm
ra max.	1 mm
rb max.	0,6 mm
Weight	1,13 Kg
Basic dynamic load rating (C)	70 kN
Basic static load rating (C0)	135 kN
(Grease) Lubrication Speed	2000 r/min
Category	Thrust Ball Bearing
Inventory	0.0



Timken BEARINGS INDUSTRY

Manufacturer Name	NSK
Minimum Buy Quantity	N/A
Weight / Kilogram	1.35
Product Group	B00308
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Double Direction
Banded	No
Cage Material	Steel
Precision Class	Non-Precision
Component Description	Roller Assembly Plus Raceways
Other Features	Double Row With Aligning Seat
Long Description	30MM Bore 1; 42MM Bore 2; 78MM Outside Diameter; 54MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171552
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	http://www.nskamericas.com
Weight / LBS	2.29281
Height	2.126 Inch 54 Millimeter
Overall Height with Aligning Washer	0 Inch 0 Millimeter
Bore 1	1.181 Inch 30 Millimeter
Bore 2	1.654 Inch 42 Millimeter
Outside Diameter	3.071 Inch 78 Millimeter



Timken BEARINGS INDUSTRY