




# Timken BEARINGS INDUSTRY

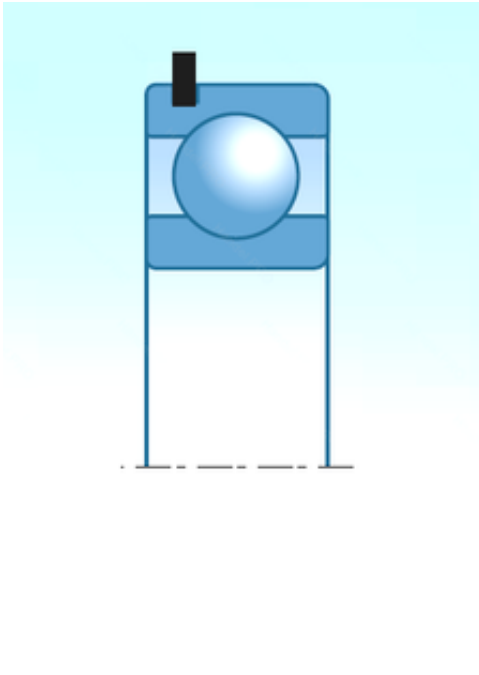

6007ZZNR Bearing 2D drawings and 3D CAD models

35,000 mm x 62,000 mm x 14,000 mm NTN  
6007ZZNR deep groove ball bearings

Bearing No. 6007ZZNR

Size	35x62x14 mm
Bore Diameter	35,000 mm
Outer Diameter	62,000 mm
Width	14,000 mm
d	35,000 mm
D	62,000 mm
B	14,000 mm
C	14,000 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359010329
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	35MM Bore; 62MM



## Timken BEARINGS INDUSTRY

	Outside Diameter; 14MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove   With Snap Ring
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	0.3373
Outside Diameter	2.441 Inch   62 Millimeter
Bore	1.378 Inch   35 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outer Race Width	0.551 Inch   14 Millimeter
bore diameter:	35 mm
precision rating:	ISO Class 0
outside diameter:	62 mm
finish/coating:	Uncoated
overall width:	14 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	14 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	14 mm
snap ring included:	With Snap Ring



## Timken BEARINGS INDUSTRY

maximum rpm (grease):	12000 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	14000 RPM
dynamic load capacity:	16000 N
series:	60
static load capacity:	10300 N
manufacturer product page:	<a href="#">Click here</a>